RocketU 1022A/
RocketU Dual USB 3.0 for Mac
Host Controller

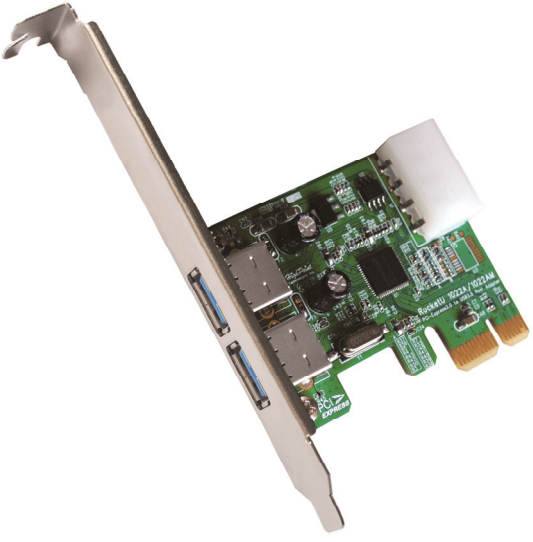

Quick Installation Guide

V1.0

Content

HighPoint RocketU 1022A/RocketU Dual USB 3.0 for Mac – PCI-Express 2.0 3

Installing the RU Series Host Adapter 4

Driver Installation (Microsoft Windows) 4

RocketU 1022A 4

RocketU Dual USB 3.0 for Mac 5

Connecting USB Storage Devices 6

Kit contents 6

Customer Support 7

FCC Part 15 Class B Radio Frequency Interference statement 8

HighPoint RocketU 1022A/RocketU Dual USB 3.0 for Mac – PCI-Express 2.0

USB 3.0 Introduction

USB 3.0's Super-Speed interface represents the next revolution in I/O interconnectivity standards. The 5Gb/s throughput is 10 times faster than USB 2.0, and delivers the bandwidth required by today's fastest external drives.

HighPoint RocketU 1022A/RocketU Dual USB 3.0 for Mac

The RocketU 1022A/RocketU Dual USB 3.0 for Mac is an external, 2-port Super-Speed USB 3.0 PCI-Express 2.0 x1 host storage controller. The RocketU 1022A/RocketU Dual USB 3.0 for Mac delivers class-leading 5Gb/s transfer bandwidth, and is optimized for external SSD and hard drive configurations.

Key Features

- USB 3.0 Super Speed Quad-Port PCI-Express 2.0 x1 Storage Controller
- Two dedicated 5Gb/s Super Speed Ports
- Total Transfer Bandwidth up to 5Gb/s
- Optimized for external USB drives and drive enclosures
- Backwards compatible with USB 2.0 & 1.1
- Driver support for Microsoft Windows 7, 2008, Vista, and Linux distributions
- Compliant with xHCI (Extensible Host Controller Interface) spec.

Installing the RU Series Host Adapter

Note: Make sure the system is powered-off before installing the RU series host adapter.

1. Open the system chassis and locate an unused PCI-Express (2.0 or 1.0) ×1(×4, ×8, ×16) slot.
2. Remove the PCI-Express slot cover.
3. Gently insert the RU series into the PCI-Express slot, and secure the bracket to the system chassis.
4. After installing the adapter, attach the hard disks or disk enclosure to the RU series card using the USB cables.
5. Close and secure the system chassis.

Driver Installation (Microsoft Windows)

RocketU 1022A

Install from setup program

Double click the “setup.exe” and follow the setup wizard steps to install the Asmedia ASM1042x USB 3.0 Host controller driver.

Verify installation of the software

1. On the Start menu, select 'Control Panel'
2. Open on the 'System' applet (you may first have to select 'Switch to Classic View')
3. Select the 'Hardware' tab
4. Select the 'Device Manager' button.
5. For Vista, Server 2008, Win7, Expand the 'Universal Serial Bus Controllers' entry
6. Right-click on 'Asmedia xHCI Controller'
7. Select 'Properties'

8. Select the 'Driver' tab
9. Select the 'Driver Details' button
10. The follow file should be displayed, then installation was successful:
    -'system32\DRIVERS\asmtxhci.sys' Vista, Server 2008 and Win7

RocketU Dual USB 3.0 for Mac

Once you have installed the RocketU Dual USB 3.0 for Mac Card and booted your Mac, follow these instructions to install the drivers and the HighPoint Web Manager software:

1) Insert the RocketU Dual USB 3.0 for Mac Card Install Disc into your Mac and navigate to the DMG folder.
2) Double-click on the “dmg” file to mount the disc image containing the Mac OS X software and drivers.
3) Double-click on the installer package labeled to start the installation process.
4) Follow the on-screen steps to complete the installation process. After the install has completed, you will be prompted to restart your computer. You will need to restart in order to use the RocketU Dual USB 3.0 for Mac Card.

Note: Consult the software copy of the RocketU Dual USB 3.0 for Mac User Guide for in-depth installation procedures.

Connecting USB Storage Devices

1. Make sure your computer is operational.
2. Connect the enclosure or hard disk to the HighPoint RocketU HBA with USB 3.0 cables.
3. Allow the drives/enclosure to spin up for a few moments. Once the devices are ready, they will be recognized by the operating system and can be accessed as needed.

Kit contents

- RocketU 1022A/RocketU Dual USB 3.0 for Mac host controller
- Software CD
- Quick Installation Guide
- Low profile bracket

Customer Support

If you encounter any problems while utilizing the RocketU series host adapter, or have any questions about this or any other HighPoint Technologies, Inc. product, feel free to contact our Customer Support Department.

Web Support: http://www.highpoint-tech.com/websupport/

HighPoint Technologies, Inc. websites:
http://www.highpoint-tech.com
http://www.hptmac.com

FCC Part 15 Class B Radio Frequency Interference statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Modifications not expressly approved by the manufacturer could void the user's authority to operate the equipment under FCC rules.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

European Union Compliance Statement

This Information Technologies Equipment has been tested and found to comply with the following European directives:

- European Standard EN55022 (1998) Class B
- European Standard EN55024 (1998)